

# SNAP GRID®

## SnapGRID® LX2 Interlocking Garage Tiles

Lay, Click, Repeat.

Create the Ultimate Garage Floor in a Snap!

**MULTI-PURPOSE**

**EASY DIY  
INSTALLATION**

**SELF-DRAINING**

*SnapGRID® LX2 snap in place flooring is durable, fully portable, and out performs epoxy, vinyl and rubber flooring options in any application with exposure to accumulated moisture. SnapGRID® LX2 tiles create a self-draining surface, providing extra grip and safety.*

*Easily configured to suit your specific needs, SnapGRID® LX2 tiles are easy to work with, easy to clean, and ultra-durable; the perfect long-lasting alternative in a multitude of applications including garages, workshops, man caves, and any other wet area requiring drainage.*




2007 - 4 Highland Park Green NE  
Airdrie, AB T4A 0X3

587.775.8838  
888.363.6289

sales@perfectsurfaces.ca

www.perfectsurfaces.com



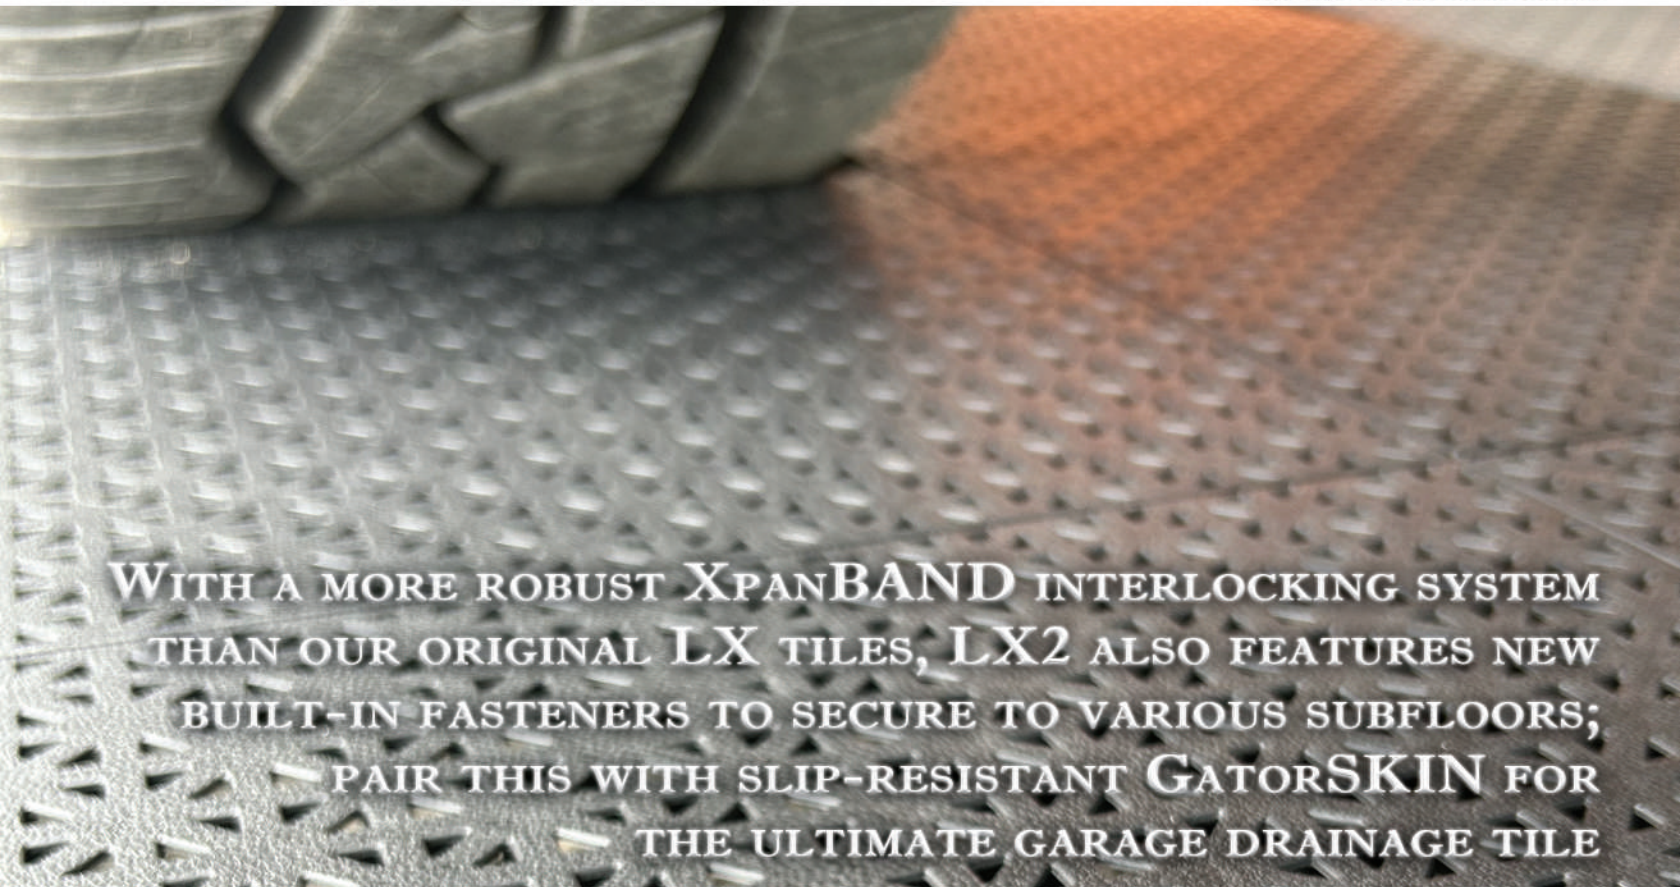

**WITH A MORE ROBUST XPANBAND INTERLOCKING SYSTEM THAN OUR ORIGINAL LX TILES, LX2 ALSO FEATURES NEW BUILT-IN FASTENERS TO SECURE TO VARIOUS SUBFLOORS; PAIR THIS WITH SLIP-RESISTANT GATORSKIN FOR THE ULTIMATE GARAGE DRAINAGE TILE**

### STANDARD TILE DIMENSIONS

SIZE	THICKNESS
30CM x 30CM (12"x12")	12MM (1/2")

### SNAPGRID<sup>®</sup> LX2 SPECIFICATIONS

MATERIAL	POLYPROPYLENE (PP)
HIGH TEMP TOLERANCE	+80°C
LOW TEMP TOLERANCE	-50°C
REBOUND RATE	93%
SHOCK ABSORPTION	32%
COEFFICIENT OF FRICTION	0.62
VERTICAL DEFORMATION	0.49MM
TENSILE STRENGTH	0.9MPA
<b>RESISTANCE:</b>	
ANTI-SLIP (DRY TEST)	98.8BPN
ANTI-SLIP (WET TEST)	56.2BPN
ACID (30% SULFURIC ACID SOAK FOR 48 HOURS)	NO SIGNIFICANT CHANGE
ALKALI (20% SODIUM BICARBONATE SOAK FOR 48 HOURS)	NO SIGNIFICANT CHANGE

